

EDIUS 7 Setup Instruction for working with AJA Hardware


Preparation

Install the AJA Win Drivers v10.5.1 software and confirm that your AJA hardware works properly.

Switching working mode (only KONA 3G card)


You need to switch working mode in AJA Control Panel due to 4K or standard mode:

- 1) Quit EDIUS if running.
- 2) Choose [Start] > [All Programs] > [AJA] > [AJA Control Panel].
- 3) AJA Control Panel will appear. Choose [Firmware] in the left-pane.
- 4) Choose desired mode from the list then click [Install] button.

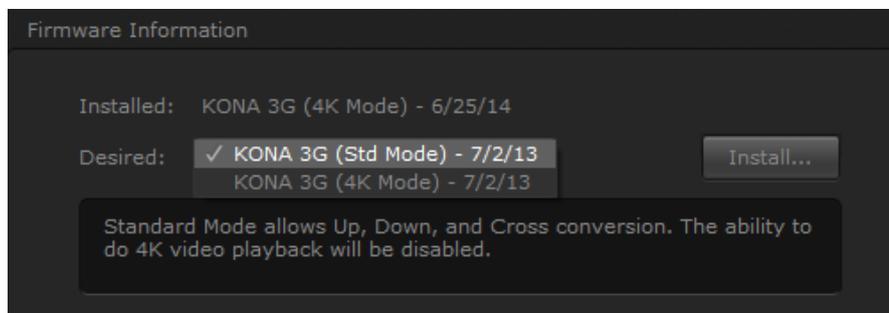

- 5) Selected firmware will be programmed. Do NOT quit AJA Control Panel or turn off the computer during programming the firmware.
- 6) Once programming the firmware succeeded, below dialog will appear. Please click [Shutdown] button.


NOTE: If you click [Cancel] button, please shutdown then restart the computer. AJA KONA 3G card will not work by programmed firmware until shutdown then restarting the computer.

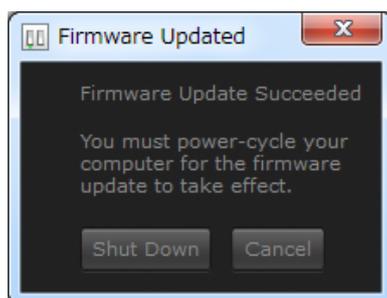

Configuring preview device

- 1) Choose [Settings] > [System Settings].
- 2) System settings window will appear. Choose [Hardware] > [Preview Device] in the left-pane.
- 3) Check installed AJA hardware then click [...] button.

- 4) Configuration dialog for stereoscopic editing will appear. Configure the settings.

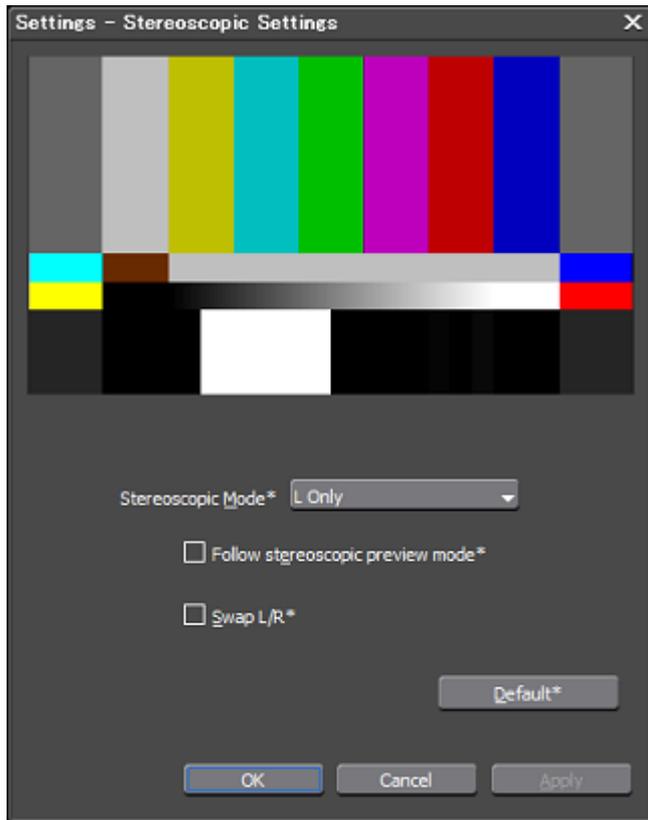

- 5) Click [Apply] then [OK] button.